




MCT-CM Multi-loop Control System Part Number Matrix and Pricing

The MCT-CM Multi-loop Control System combines all of the features of typical loop controls, video/chart recorders and data logging systems into a single, intuitive device. Email (supporting SSL/TLS), SMS (text messaging), FTP, FileWeb, DataWeb (file transfer protocols for automated data backup and web database interface) and remote viewing/control (via Web server/VNC server) are standard with the MCT-CM and can be accessed via LAN/WAN using a PC, tablet or smart phone device.

The MCT-CM is offered in 4.3" and 7" color touch screen interfaces with standard "Smart Device" user interface features for multi-loop OEM control applications (up to 10 loops). All loop configuration and runtime user access are configurable at the device with no PC software required. OEM's have the ability to configure runtime features (screen availability, menus, language, etc...) to easily customize the system to their requirements. These configurations can be imported/exported to any other MCT-CM device for setup within minutes by the touch of a button.

In addition to a maximum of ten loops of control, the MCT-CM can also provide up to an additional 15 inputs for process monitoring for a total of 25 process inputs. The base system is provided with eight 24Vdc digital inputs (DI) and 8 relay outputs. The MCT-CM can be expanded to a total of 16 digital inputs and 32 digital outputs. It also provides the capability of accepting up to 14 analog inputs for remote set point control as well providing 7 analog outputs capable of retransmitting system variables (PV, SP or %Out) to other devices. The 0-10Vdc or 4-20mA user selectable signals are provided through the addition of optional analog expander cards.

Individual process controls, one for each loop in the system, provide reliable, consistent and accurate control by distributing the process control requirements of the system among multiple processors. Each loop control provides full auto tune functionality with high resolution, universal process inputs. When coupled with the built-in ramping programmer, it allows for automatic, timed control of all processes and outputs of the system.

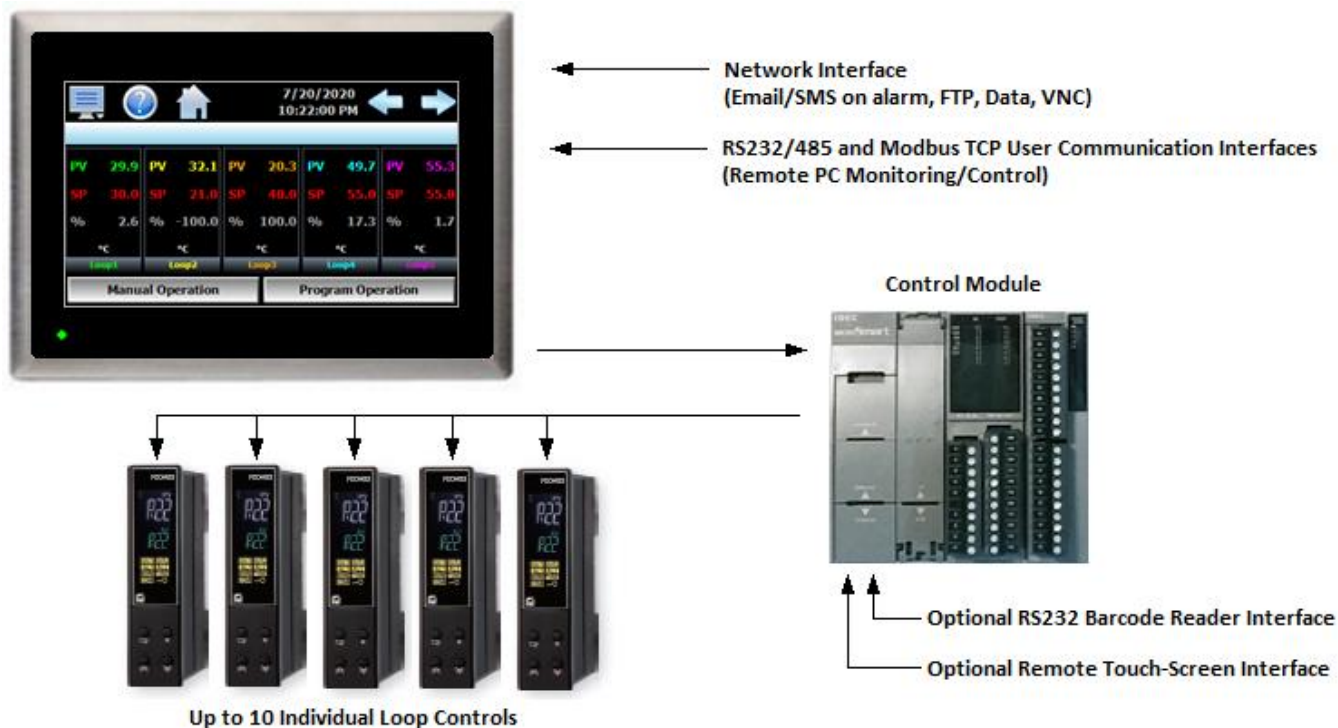



MCT-CM Multi-loop Control System Part Number Matrix and Pricing

The MCT-CM is ordered as three components: the color touch screen, firmware and the Control Module (CM) with its assorted options. The loop controls are ordered separately.

MCT-CM Sample Part Numbers			
<i>(minimum of 3 component part numbers is required; (1) Display, (2) Firmware and (3) Control Module)</i>			
Item #	Product	Sample Part Number	Description
1	Display	FDC-0450-1011-000BN	4.3" display, 11-36 VDC power input, SD slot, Ethernet
2	CM Firmware	SD-4CM	CM Control Module Firmware (inserted into display SD slot)
3	Control Module	CM6-0000-010	Base CM, no optional serial communications, DI, DO, AI or AO and (1) 8-channel monitor card (T/C)
Options			
	Power Supply	PS5R-SV24	100-240VAC power input, Output 24VDC 60W (2.5A)
	Cable	CA-232-8A	Cable from display to control module (DB9 connector (display), pigtail on CM, (8ft)
	Loop Controls	9300-413001	9300 1/16 DIN control, input #1 universal (T/C, RTD, mA &VDC) Input #2 linear (mA & VDC may be used as monitor input) Output #1 mA PID, RS485 communications

Item #1	Model FDC-0450 (4.3") / FDC-0730 (7") Color Touch Screen									
FDC – 0450 –	<input type="text" value="1"/>	<input type="text" value="0"/>	<input type="text" value="1"/>	<input type="text" value="1"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="B"/>	<input type="text" value="N"/>	FDC-0450 Price: \$375
FDC – 0730 –	<input type="text" value="1"/>	<input type="text" value="0"/>	<input type="text" value="1"/>	<input type="text" value="1"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="B"/>	<input type="text" value="N"/>	FDC-0730 Price: \$755
Order Matrix #	1	2	3	4	5	6	7	8	9	
(1) Power Input 1: 11 to 36 VDC					(6) Software 0: None					
(2) Sound Output 0: None					(7) Enclosure 0: Standard					
(3) SD Card Slot 1: Yes					(8) Overlay Color B: Black Overlay					
(4) Ethernet 1: Yes					(9) Special Code N: Neutral Overlay (no name/logo)					
(5) Network 0: None										

Item #2	MCT-CM Control Software		Price: included with display
Order Matrix #	SD -	<input type="text" value=""/>	CM
<i>(order #4 designates software for i4.3 display and #7 designates software for i7 display)</i>			



MCT-CM Multi-loop Control System Part Number Matrix and Pricing

Item #3	Control Module (loop controls ordered separately)	Base Price: \$450
CM6 -	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> (note 3)	
Order Matrix #	1 2 3 4 5 6 7	

1. Control Module (CM) Application Software (Note 3)

- 0: **CM22:** CM software for FDC C-Series R22 (note 1)
- 2: **CM30:** CM software for FDC 300 Series (note 1)
- 9: **Special**

Note: CM includes FC6A-SIF52 dual communication card which is required for local display and loop control communications.

2. Optional Serial Communications (Note 2)

- 0: **None**
- 1: **FC6A-PC3** RS485 Modbus RTU port (slave)* **\$120**
- 2: **FC6A-PC1** RS232 port for Barcode Reader ** **\$120**
- 3: **Both FC6A-PC3 and FC6A-PC1** **\$190**

Note: Order of any above communication option will also include the required FC6A-HPH1 cartridge adapter.

*RS485 Modbus RTU port allows installation of remote display.

**Bar Code Reader input is compatible for serial-based barcode readers.

3. Optional Digital Inputs (Note 2)

- 0: **None**
- 1: **FC6A-N08B1** 8-digital input card (24Vdc) **\$75**
- 2: **FC6A-N08A11** 8-digital input card (120Vac) **\$125**

Note: The above optional digital inputs (DI) are in addition to the eight 24Vdc digital inputs that are standard on the CM; system maximum of 16 digital inputs.

4. Optional Digital Outputs (Note 2)

- 0: **None**
- 1: **FC6A-T08P1** 8-digital output— TTL 24Vdc (source) **\$175**
- 2: **FC6A-R081** 8-digital output - Relay (240Vac 2-amps) **\$120**
- 3: **FC6A-T16P1** 16-digital output— TTL 24Vdc (source) **\$175**
- 4: **FC6A-R161** 16-digital output - Relay (240Vac 2-amps) **\$195**

Combination DO modules (maximum of 24 optional DO)

- | | |
|---|-----------------------------|
| A: Item 1 / qty 2 \$350 | G: Items 1 & 3 \$350 |
| B: Item 1 / qty 3 \$525 | H: Items 1 & 4 \$370 |
| C: Item 2 / qty 2 \$240 | J: Items 2 & 3 \$295 |
| D: Item 2 / qty 3 \$345 | K: Items 2 & 4 \$315 |
| E: Item 1 qty 2 & Item 2 qty 1 \$470 | |
| F: Item 1 qty 1 & Item 2 qty 2 \$415 | |

Note: The above optional digital outputs (DO) are in addition to the 8 DO that are standard on the CPU; maximum of 32 DO.

5. Optional Analog I/O (Note 2) (DIN Rail Mount – plug into CM)

- 0: **None**
- 1: **1 A-I/O card** **FC6A-L03CN1** (4-20mA or 0-10Vdc IO) **\$290**
- 2: **2 A-I/O cards** **FC6A-L03CN1** (4-20mA or 0-10Vdc IO) **\$580**
- 3: **3 A-I/O cards** **FC6A-L03CN1** (4-20mA or 0-10Vdc IO) **\$870**
- 4: **4 A-I/O cards** **FC6A-L03CN1** (4-20mA or 0-10Vdc IO) **\$1,160**
- 5: **5 A-I/O cards** **FC6A-L03CN1** (4-20mA or 0-10Vdc IO) **\$1,450**
- 6: **6 A-I/O cards** **FC6A-L03CN1** (4-20mA or 0-10Vdc IO) **\$1,740**
- 7: **7 A-I/O cards** **FC6A-L03CN1** (4-20mA or 0-10Vdc IO) **\$2,030**

Note: Each I/O card has qty 2 Remote Setpoint input and quantity 1 Retransmission output configurable for PV, SP or %Out

6. Optional Monitor Inputs (Note 1) (serial connection to CM)

Still to do

- 0: **None**
- 1: **IO-8TCS:** (8-thermocouple input module - isolated) **\$375**
- 2: **IO-6RTD:** (6-RTD input module) **\$325**
- 3: **IO-8AIIS:** (8- input module 0-20 / 4-20mA - isolated) **\$375**
- 4: **IO-8AIVS:** (8-analog input 0-10 / 2-10Vdc—isolated) **\$375**

Combination Monitor Input Modules (maximum of 2 & 15 points)

- | | |
|--------------------------------|-----------------------------|
| A: Item 1 / qty 2 \$750 | F: Items 1 & 3 \$750 |
| B: Item 2 / qty 2 \$650 | G: Items 1 & 4 \$750 |
| C: Item 3 / qty 2 \$750 | H: Items 2 & 3 \$700 |
| D: Item 4 / qty 2 \$750 | I: Items 2 & 4 \$700 |
| E: Items 1 & 2 \$700 | J: Items 3 & 4 \$750 |

7. Special

- 0: **None**

Note 1: Maximum of 2 monitor input cards monitoring a maximum of 15 monitor card inputs. With specific CM software (CM30), the loop control's input #2 may be configured as a monitor point. System maximum of 15 monitor points made up of loop control input #2, inputs of monitor cards or combination of both.

Note 2: CM will support up to 7 expansion modules (the monitor point input module is not a CM expansion module).

Note 3: CM6-XXXXXXX includes the following standard components:

Part #: FC6A-D16R1CEE
Control Module with 8 Digital Inputs (DI) and 8 Relay Outputs (DO)

Part #: FC6A-SD
SD Memory Card with specified loop control firmware.

All other CM (Control Module) options are packaged separately and like the FC6A-SIF52 must be plugged into the FC6A-D16R1CEE bus as described in the manual. The exception is the Monitor Card(s) which are not part of the FC6A-D16R1CEE bus and have separate power supply and RS485 communication wiring. The Monitor Card serial RS485 is wired to the FC6A-SIF52 card along with any loop controls.



MCT-CM Multi-loop Control System Part Number Matrix and Pricing

Control System Options *(ordered separately as needed)*

System Power Supply (input 100-240VAC / Output 24VDC) **\$55**
 PS5R-VD24 60W power supply (2.5A)

System Reset Timer **\$25**
 GE1A-C10HA110/SR2P-06 Reset Timer and socket (DIN RAIL)

Note: Timer is recommended for proper system restart due to momentary power interruptions (<500ms) which can cause erroneous operation.

USB Memory Stick **\$15**
 UDF115-8GB 8GB High Capacity USB Memory Stick (3VDC)

Replacement 8GB SD SLC Class 10 or better Memory Card

SD-4CM	SD Memory Card preloaded with MCT-CM i4.3 application software for FDC430 4.3" HMI	\$50
SD-7CM	SD Memory Card preloaded with MCT-CM i7 application software for FDC730 7" HMI	\$50

Cable: Touch Screen Display to Control Module **\$9**
 CA-232-8A Cable (2.5 meters) from display to control module (CM)

Note: Consult factory for other lengths & options

DIN Rail Mounting Adapter for 1/16DIN Controls **\$20**
 DRA-16 1/16 DIN Rail Mounting Adapter

FUTURE DESIGN CONTROLS
 P.O. Box 1196
 Bridgeview, IL 60455
 888.751.5444
 888.307.8014 Fax

www.futuredesigncontrols.com
csr@futuredesigncontrols.com